

# Category 6 S/FTP Euroclass C<sub>ca</sub> Cables

Datasheet: GD103442v2

**Brand-Rex** | a LEVITON company


## APPLICATION

The Brand-Rex C6S/FTP C<sub>ca</sub> cables are compliant with the European Construction Products Regulation, achieving Euroclass level C<sub>ca</sub> according to EN 13501-6. These C<sub>ca</sub> Euroclass cables also have optimum levels of smoke emission, flaming droplets and acid gas production making them a versatile choice for most internal installation. The C6S/FTP C<sub>ca</sub> Euroclass cables are suited to any high density backbone installation where people safety in the case of fire is a high priority.

The Brand-Rex C6S/FTP cables exceed the Category 6 performance standards. They are rated to 250MHz and are suitable for use in all Class E structured wiring cable systems. The applications supported include Gigabit Ethernet, PoE and PoE+ and broadband video transmissions at frequencies up to 250MHz.

## FEATURES AND BENEFITS

- 23 AWG Solid Annealed Copper Wire
- 4 Twisted Pairs Individually Screened and cabled together – providing EMI immunity
- Overall Braided Screen – for improved shielding efficiency, increased mechanical robustness and heat dissipation
- Designed to Support all Class E protocols including Gigabit Ethernet
- Supports Power Over Ethernet (PoE) and Power Over Ethernet Plus (PoE+) Applications
- Enhanced HFFR-LS\* material meets the requirements of the Construction Products Regulation (CPR) Euroclass C<sub>ca</sub>
- Green† Coloured Jacket to identify Euroclassification level C<sub>ca</sub>
- Included in the Leviton and Brand-Rex 25 Year System Warranties when used in conjunction with Leviton or Brand-Rex copper connectivity. System warranties available for qualified projects installed by certified contractors

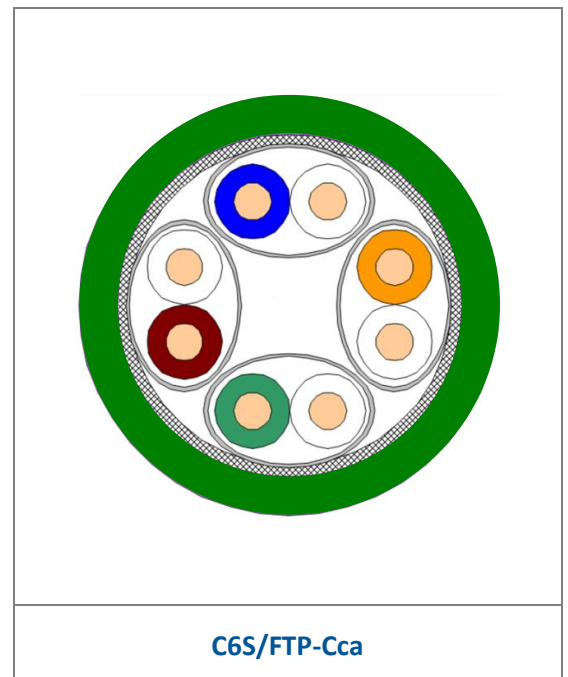

\* Halogen Free Flame Retardant – Low Smoke

† Also available in a range of non-standard colours

## STANDARDS

Applicable Cable Standards: IEC 61156-5 and EN50288-5-1

## REACTION TO FIRE

CHARACTERISTIC	STANDARD	RATING
Single Cable Flame Rating	IEC 60332-1-2	Pass
Bundled Cable Flame Rating	EN 50399 20.5kW source	C <sub>ca</sub>
Smoke Production	EN 50399	s1a
Flaming Droplets / Particles	EN 50399	d0
Acid Gas Emission / Acidity	EN 50267-2-3	a1
Euroclassification	EN 13501-6	C <sub>ca</sub> s1a d0 a1

# Category 6 S/FTP Euroclass C<sub>ca</sub> Cables

Datasheet: GD103442v2

**Brand-Rex** | a LEVITON company

## PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω / 100m	14Ω / 100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

## SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 25nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Coupling Attenuation	Type 1	90dB
Transfer Impedance	Grade 1	8mΩ/m @ 10MHz

## ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	2.1	3.8	6.0	8.5	19.9	29.1	33.0	na	na
	<i>Typical</i>	<b>1.9</b>	<b>3.5</b>	<b>5.5</b>	<b>7.8</b>	<b>18.0</b>	<b>26.1</b>	<b>29.4</b>	<b>43.0</b>	<b>45.4</b>
NEXT (dB)	Standard	66.0	65.3	59.3	54.8	44.3	39.8	38.3	na	na
	<i>Typical</i>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>94.3</b>	<b>88.9</b>	<b>87.1</b>	<b>81.7</b>	<b>81.0</b>
PSNEXT (dB)	Standard	64.0	63.3	57.3	52.8	42.3	37.8	36.3	na	na
	<i>Typical</i>	<b>97.0</b>	<b>97.0</b>	<b>97.0</b>	<b>97.0</b>	<b>91.3</b>	<b>85.9</b>	<b>84.1</b>	<b>78.7</b>	<b>78.0</b>
ELFEXT (dB/100m)	Standard	66.0	58.0	50.0	44.0	30.0	24.0	22.0	na	na
	<i>Typical</i>	<b>90.0</b>	<b>90.0</b>	<b>90.0</b>	<b>84.8</b>	<b>70.8</b>	<b>64.8</b>	<b>62.8</b>	<b>56.8</b>	<b>56.0</b>
PSELFEXT (dB/100m)	Standard	64.0	55.0	47.0	41.0	27.0	21.0	19.0	na	na
	<i>Typical</i>	<b>87.0</b>	<b>87.0</b>	<b>87.0</b>	<b>81.8</b>	<b>67.8</b>	<b>61.8</b>	<b>59.8</b>	<b>53.8</b>	<b>53.0</b>
Return loss (dB)	Standard	na	23.0	25.0	25.0	20.1	18.0	17.3	na	na
	<i>Typical</i>	<b>27.0</b>	<b>30.0</b>	<b>30.0</b>	<b>30.0</b>	<b>25.1</b>	<b>23.0</b>	<b>22.3</b>	<b>20.2</b>	<b>19.9</b>
ACR (dB/100m)	<i>Typical</i>	<b>98.1</b>	<b>96.5</b>	<b>94.5</b>	<b>92.2</b>	<b>76.3</b>	<b>62.8</b>	<b>57.7</b>	<b>38.7</b>	<b>35.6</b>
PSACR (dB/100m)	<i>Typical</i>	<b>95.1</b>	<b>93.5</b>	<b>91.5</b>	<b>89.2</b>	<b>73.3</b>	<b>59.8</b>	<b>54.7</b>	<b>35.7</b>	<b>32.6</b>

# Category 6 S/FTP Euroclass C<sub>ca</sub> Cables

Datasheet: GD103442v2

**Brand-Rex** | a **LEVITON**  
company

## INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg per simplex cable	Field Test NVP Value	0.80
Segregation Class	Class D		

## PRINT LEGEND

Example print legend:

[Length Mark]m BRAND-REX a LEVITON company C6S/FTP-Cca Cat 6 S/FTP EN 50399 Euroclass Cca s1a d0 a1 NVP 0.80  
MADE IN UK [ID number] [Week/Year]

## STANDARD PACKAGING SPECIFICATIONS

Brand-Rex Part Number	Packaging Length (m)	Colour	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
C6S/FTP-Cca-500GN	500	Green†	7.2	48.4	400 x 390	26.7	12
C6S/FTP-Cca-1000GN	1000	Green†	7.2	48.4	600 x 405	54.8	4

†Also available in a range of non-standard colours

*“Brand-Rex is dedicated to designing, developing and manufacturing sustainable high performance structured cabling and speciality cabling solutions”*

The information contained in this document is valid and correct at the time of issue. Brand-Rex reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.