

Category 6A S/FTP Euroclass D_{ca} Cables

Datasheet: GD103529v2

Brand-Rex a LEVITON company

APPLICATION

The Brand-Rex AC6S/FTP D_{ca} cables are compliant with the European Construction Products Regulation, achieving Euroclass level D_{ca} according to EN 13501-6. These D_{ca} Euroclass cables also have optimum levels of smoke emission, flaming droplets and acid gas production making them a versatile choice for many internal installations. The AC6S/FTP D_{ca} Euroclass cables are suited to many high density backbone installations where people safety in the case of fire is a high priority.


Brand-Rex AC6S/FTP cables exceed the Category 6_A performance standards. They are rated to 500MHz and are suitable for use in all Class E_A structured wiring cable systems. The applications supported include 10 Gigabit Ethernet, Gigabit Ethernet, PoE and PoE+ and broadband video transmissions.

FEATURES AND BENEFITS

- 23 AWG Solid Annealed Copper Wire
- 4 Twisted Pairs Individually Screened and cabled together – providing EMI immunity
- Overall Braided Screen – for improved shielding efficiency, increased mechanical robustness and heat dissipation
- Designed to Support all Class E_A protocols including 10GBASE-T
- Supports Power Over Ethernet (PoE) and Power Over Ethernet Plus (PoE+) Applications
- HFFR-LS* material meets the requirements of the Construction Products Regulation (CPR) Euroclass D_{ca}
- Blue+ Coloured Jacket to identify Euroclass level D_{ca}.
- Included in the Leviton and Brand-Rex 25 Year System Warranties when used in conjunction with Leviton or Brand-Rex copper connectivity. System warranties available for qualified projects installed by certified contractors.

* Halogen Free Flame Retardant – Low Smoke

† Also available in a range of non-standard colours

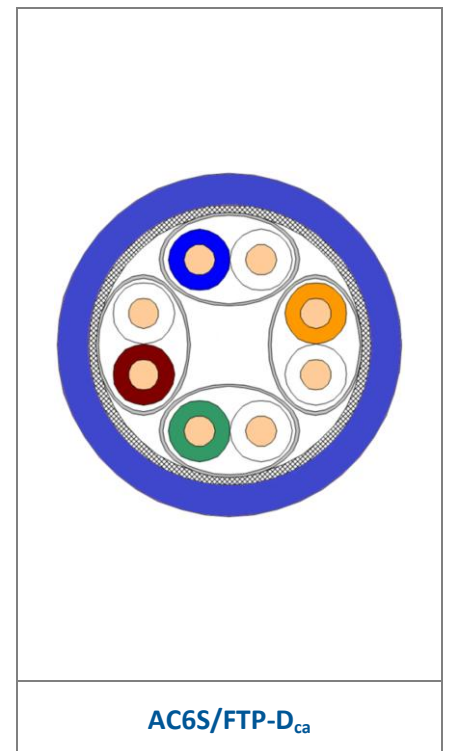

STANDARDS

Applicable Cable Standards: IEC 61156-5 and EN50288-10-1

REACTION TO FIRE

CHARACTERISTIC	STANDARD	RATING
Single Cable Flame Rating	IEC 60332-1-2	Pass
Bundled Cable Flame Rating	EN 50399 20.5kW source	D _{ca}
Smoke Production	EN 50399	s1
Flaming Droplets / Particles	EN 50399	d1
Acid Gas Emission / Acidity	EN 50267-2-3	a1
Euroclassification	EN 13501-6	D _{ca} s1 d1 a1

Category 6A S/FTP Euroclass D_{ca} Cables

Datasheet: GD103529v2

Brand-Rex a LEVITON company

PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω / 100m	14Ω / 100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 25nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Coupling Attenuation	Type 1	90dB
Transfer Impedance	Grade 1	8mΩ/m @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	na	3.8	5.9	8.4	19.1	27.6	31.1	45.3	na
	<i>Typical</i>	1.9	3.5	5.5	7.8	18.0	26.1	29.4	43.0	45.4
NEXT (dB)	Standard	na	66.3	60.3	55.8	45.3	40.8	39.3	34.8	na
	<i>Typical</i>	100.0	100.0	100.0	100.0	94.3	88.9	87.1	81.7	81.0
PSNEXT (dB)	Standard	na	63.3	57.3	52.8	42.3	37.8	36.3	31.8	na
	<i>Typical</i>	97.0	97.0	97.0	97.0	91.3	85.9	84.1	78.7	78.0
ELFEXT (dB/100m)	Standard	na	56.0	48.0	42.0	28.0	22.0	20.0	14.0	na
	<i>Typical</i>	90.0	90.0	90.0	84.8	70.8	64.8	62.8	56.8	56.0
PSELFEXT (dB/100m)	Standard	na	53.0	45.0	39.0	25.0	19.0	17.0	11.0	na
	<i>Typical</i>	87.0	87.0	87.0	81.8	67.8	61.8	59.8	53.8	53.0
Return loss (dB)	Standard	20.0	23.0	25.0	25.0	20.1	18.0	17.3	17.3	na
	<i>Typical</i>	27.0	30.0	30.0	30.0	25.1	23.0	22.3	20.2	19.9
PSANEXT (dB)	Standard	67.0	67.0	67.0	67.0	62.5	58.0	56.5	52.0	na
	<i>Typical</i>	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
PSAACR-F (dB)	Standard	67.0	66.2	58.2	52.2	38.2	32.2	30.2	24.2	na
	<i>Typical</i>	98.1	96.5	94.5	92.2	82.0	73.9	70.6	57.0	54.6

Category 6A S/FTP Euroclass D_{ca} Cables

Datasheet: GD103529v2

Brand-Rex a LEVITON company

INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg per simplex cable	Field Test NVP Value	0.80
Segregation Class	Class D		

PRINT LEGEND

Example print legend:

[Length Mark]m BRAND-REX a LEVITON company AC6S/FTP-Dca Cat 6A S/FTP EN 50399 Euroclass Dca s1 d1 a1 NVP 0.80
MADE IN UK [ID number] [Week/Year]

STANDARD PACKAGING SPECIFICATIONS

Brand-Rex Part Number	Packaging Length (m)	Standard Colour	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Diameter x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6S/FTP-Dca-500BU	500	Blue †	7.0	49.5	400 x 390	27.2	12
AC6S/FTP-Dca-1000BU	1000	Blue †	7.0	49.5	600 x 405	56.0	4

†Also available in a range of non-standard colours

*“Brand-Rex is **dedicated** to **designing, developing and manufacturing** sustainable **high performance** structured cabling and speciality **cabling solutions**”*

The information contained in this document is valid and correct at the time of issue. Brand-Rex reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.