

# Category 6 S/FTP EuroClass B2ca Cables

Datasheet: GD103443v4




## APPLICATION

Leviton Category 6 S/FTP cables exceed Category 6 performance standards. They are rated to 250MHz and are suitable for use in all Class E structured wiring cable systems. The applications supported include Gigabit Ethernet, Power over Ethernet, and broadband video transmissions at frequencies up to 250MHz.

## FEATURES AND BENEFITS

- 23 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together – providing EMI immunity
- Overall braided screen – for improved shielding efficiency, increased mechanical robustness and heat dissipation
- Designed to support all Class E protocols including Gigabit Ethernet
- Enhanced HFFR-LS\* material meets the requirements of the Construction Products Regulation (CPR) EuroClass B2ca
- Orange coloured jacket to identify EuroClassification level B2ca
- Included in the Leviton Limited 25-Year System Warranty when used in conjunction with Leviton copper connectivity. System warranties are available for qualified projects installed by certified contractors

\*Halogen Free Flame Retardant – Low Smoke

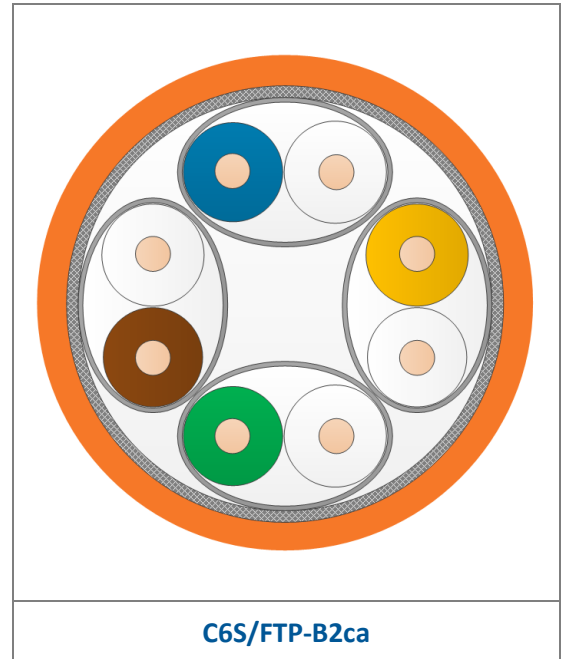

## STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
  - ISO/IEC 11801 Class E, IEC 61156-5
  - EN 50173-1 and EN 50288-5-1
  - ANSI/TIA 568C.2
- Supports Gigabit Ethernet
- Recommended for PoE standards: IEEE 802.3af, 802.3at, 802.3bt, Cisco UPoE, and Power over HDBaseT™ (PoH) up to 100 watts

## MATERIAL IDENTIFICATION

CHARACTERISTIC	STANDARD	RATING
Single Cable Flame Rating	IEC 60332-1-2	Pass
Bundled Cable Flame Rating	EN 50399 20.5kW source	B2ca
Smoke Production	EN 50399 & EN61034-2	s1a
Flaming Droplets/Particles	EN 50399	d0
Acid Gas Emission/Acidity	EN 50267-2-3	a1
EuroClassification	EN 13501-6	B2ca s1a d0 a1

# Category 6 S/FTP EuroClass B2ca Cables

Datasheet: GD103443v4



## PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω/100m	14Ω/100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

## SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Coupling Attenuation	Type 1	90dB
Transfer Impedance	Grade 1	8mΩ/m @ 10MHz

## ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	2.1	3.8	6.0	8.5	19.9	29.1	33.0	N/A	N/A
	<b>Typical</b>	<b>1.9</b>	<b>3.5</b>	<b>5.5</b>	<b>7.8</b>	<b>18.0</b>	<b>26.1</b>	<b>29.4</b>	<b>43.0</b>	<b>45.4</b>
NEXT (dB)	Standard	66.0	65.3	59.3	54.8	44.3	39.8	38.3	N/A	N/A
	<b>Typical</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>94.3</b>	<b>88.9</b>	<b>87.1</b>	<b>81.7</b>	<b>81.0</b>
PSNEXT (dB)	Standard	64.0	63.3	57.3	52.8	42.3	37.8	36.3	N/A	N/A
	<b>Typical</b>	<b>97.0</b>	<b>97.0</b>	<b>97.0</b>	<b>97.0</b>	<b>91.3</b>	<b>85.9</b>	<b>84.1</b>	<b>78.7</b>	<b>78.0</b>
ELFEXT (dB/100m)	Standard	66.0	58.0	50.0	44.0	30.0	24.0	22.0	N/A	N/A
	<b>Typical</b>	<b>90.0</b>	<b>90.0</b>	<b>90.0</b>	<b>84.8</b>	<b>70.8</b>	<b>64.8</b>	<b>62.8</b>	<b>56.8</b>	<b>56.0</b>
PSELFEXT (dB/100m)	Standard	64.0	55.0	47.0	41.0	27.0	21.0	19.0	N/A	N/A
	<b>Typical</b>	<b>87.0</b>	<b>87.0</b>	<b>87.0</b>	<b>81.8</b>	<b>67.8</b>	<b>61.8</b>	<b>59.8</b>	<b>53.8</b>	<b>53.0</b>
Return Loss (dB)	Standard	N/A	23.0	25.0	25.0	20.1	18.0	17.3	N/A	N/A
	<b>Typical</b>	<b>27.0</b>	<b>30.0</b>	<b>30.0</b>	<b>30.0</b>	<b>25.1</b>	<b>23.0</b>	<b>22.3</b>	<b>20.2</b>	<b>19.9</b>
ACR (dB/100m)	<b>Typical</b>	<b>98.1</b>	<b>96.5</b>	<b>94.5</b>	<b>92.2</b>	<b>76.3</b>	<b>62.8</b>	<b>57.7</b>	<b>38.7</b>	<b>35.6</b>
PSACR (dB/100m)	<b>Typical</b>	<b>95.1</b>	<b>93.5</b>	<b>91.5</b>	<b>89.2</b>	<b>73.3</b>	<b>59.8</b>	<b>54.7</b>	<b>35.7</b>	<b>32.6</b>

## INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg	Field Test NVP Value	0.80
Segregation Class	Class D		

# Category 6 S/FTP EuroClass B2ca Cables

Datasheet: GD103443v4



## PRINT LEGEND

Example print legend:

[Length Mark]m BRAND-REX a LEVITON company C6S/FTP-HF1-B2ca Cat 6 S/FTP EN 50399 Euroclass B2ca s1a d0 a1 NVP 0.80  
MADE IN UK [ID number] [Week/Year]

## STANDARD PACKAGING SPECIFICATIONS

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
C6S/FTP-B2ca-500OR	500	Orange	7.0	48.4	400 x 390	26.7	12
C6S/FTP-B2ca-1000OR	1000	Orange	7.0	48.4	600 x 405	54.8	4

*“Leviton is **dedicated to designing, developing and manufacturing** sustainable **high performance** structured cabling and speciality **cabling solutions**”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.