

# Category 6A U/FTP EuroClass Cca Cables

Datasheet: GD103175v6




## APPLICATION

Leviton Category 6A U/FTP cables exceed Category 6A performance standards. They are specified to 500MHz and are suitable for use in all Class EA structured wiring cable systems. Category 6A U/FTP cable supports 10 Gigabit Ethernet, Gigabit Ethernet, Power over Ethernet, voice and broadband video transmissions at frequencies up to 500MHz.

## FEATURES AND BENEFITS

- 23 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together – providing EMI immunity
- Enhanced HFFR-LS\* material enables cable to meet the requirements of the Construction Products Regulation (CPR) EuroClass Cca
- Included in the Leviton Limited 25-Year System Warranty when used in conjunction with Leviton copper connectivity. System warranties are available for qualified projects installed by certified contractors

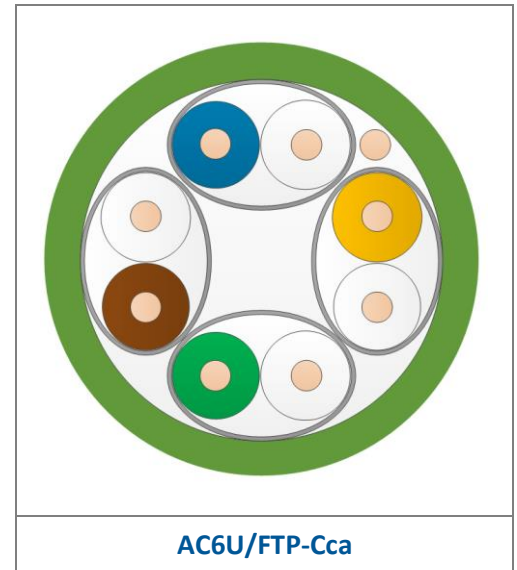

\* Halogen Free Flame Retardant – Low Smoke

## STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
  - ISO/IEC 11801 Class EA, IEC 61156-5
  - EN50173-1 and EN 50288-10-1
  - ANSI/TIA 568C.2
- Supports 10GBASE-T
- Meets the design requirements of 802.11ac wireless
- Recommended for PoE standards: IEEE 802.3af, 802.3at, 802.3bt, Cisco UPoE, and Power over HDBaseT™ (PoH) up to 100 watts

## FIRE CLASSIFICATION

CHARACTERISTIC	IEC STANDARD	EN STANDARD	CPR RATING
Reaction to Fire Classification/EuroClass	-	EN 13501-6	Cca s1a d1 a1
Single Cable Flame Rating	IEC 60332-1-2	EN 60332-1-2	Pass
Smoke Emission	IEC 61034	EN 61034	Pass
Acid Gas Emission	IEC 60754	EN 60754	Pass

# Category 6A U/FTP EuroClass Cca Cables

Datasheet: GD103175v6



## PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω/100m	14Ω/100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

## SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Coupling Attenuation	Type 1b	75dB
Transfer Impedance	Grade 2	28mΩ/m @ 10MHz

## ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	N/A	3.8	5.9	8.4	19.1	27.6	31.1	45.3	N/A
	<b>Typical</b>	<b>1.9</b>	<b>3.5</b>	<b>5.5</b>	<b>7.8</b>	<b>18.0</b>	<b>26.1</b>	<b>29.4</b>	<b>43.0</b>	<b>45.4</b>
NEXT (dB)	Standard	N/A	66.3	60.3	55.8	45.3	40.8	39.3	34.8	N/A
	<b>Typical</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>94.3</b>	<b>88.9</b>	<b>87.1</b>	<b>81.7</b>	<b>81.0</b>
PSNEXT (dB)	Standard	N/A	63.3	57.3	52.8	42.3	37.8	36.3	31.8	N/A
	<b>Typical</b>	<b>97.0</b>	<b>97.0</b>	<b>97.0</b>	<b>97.0</b>	<b>91.3</b>	<b>85.9</b>	<b>84.1</b>	<b>78.7</b>	<b>78.0</b>
ELFEXT (dB/100m)	Standard	N/A	56.0	48.0	42.0	28.0	22.0	20.0	14.0	N/A
	<b>Typical</b>	<b>90.0</b>	<b>90.0</b>	<b>90.0</b>	<b>84.8</b>	<b>70.8</b>	<b>64.8</b>	<b>62.8</b>	<b>56.8</b>	<b>56.0</b>
PSELFEXT (dB/100m)	Standard	N/A	53.0	45.0	39.0	25.0	19.0	17.0	11.0	N/A
	<b>Typical</b>	<b>87.0</b>	<b>87.0</b>	<b>87.0</b>	<b>81.8</b>	<b>67.8</b>	<b>61.8</b>	<b>59.8</b>	<b>53.8</b>	<b>53.0</b>
Return Loss (dB)	Standard	20.0	23.0	25.0	25.0	20.1	18.0	17.3	17.3	N/A
	<b>Typical</b>	<b>27.0</b>	<b>30.0</b>	<b>30.0</b>	<b>30.0</b>	<b>25.1</b>	<b>23.0</b>	<b>22.3</b>	<b>20.2</b>	<b>19.9</b>
PSANEXT (dB)	Standard	67.0	67.0	67.0	67.0	62.5	58.0	56.5	52.0	N/A
	<b>Typical</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>	<b>100.0</b>
PSAACR-F (dB)	Standard	67.0	66.2	58.2	52.2	38.2	32.2	30.2	24.2	N/A
	<b>Typical</b>	<b>98.1</b>	<b>96.5</b>	<b>94.5</b>	<b>92.2</b>	<b>82.0</b>	<b>73.9</b>	<b>70.6</b>	<b>57.0</b>	<b>54.6</b>

## INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg	Field Test NVP Value	0.80
Segregation Class	Class C		

# Category 6A U/FTP EuroClass Cca Cables

Datasheet: GD103175v6



## PRINT LEGEND

Example print legend:

[Length Mark]m BRAND-REX a LEVITON company AC6U/FTP-Cca Cat 6A U/FTP EN 50399 EuroClass Cca s1a d1 a1 NVP 0.80  
MADE IN UK [ID number] [Week/Year]

## STANDARD PACKAGING SPECIFICATIONS - REELS

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6U/FTP-Cca-500GN	500	Green†	6.7	44.5	400 x 390	24.7	12
AC6U/FTP-Cca-1000GN	1000	Green†	6.7	44.5	600 x 325	50.5	6

## STANDARD PACKAGING SPECIFICATIONS - BOXES

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Box Size L x W x H (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6U/FTP-Cca-305GN	305	Green†	6.7	44.5	475 x 295 x 475	14.6	12

†Also available in a range of non-standard colors

*“Leviton is **dedicated to designing, developing and manufacturing** sustainable **high performance** structured cabling and speciality **cabling solutions**”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.