

Optical Twin Sheath Steel Tape Armoured Multi Loose Tube Cables

Datasheet: GD102837v2

Brand-Rex | a LEVITON company


APPLICATION

This Brand-Rex Twin Sheath Steel Tape Armoured Multi-Loose Tube Cable family offers up to 24 fibres in a more compact design. The range features enhanced mechanical properties over the Duct Grade Multi Loose Tube product range.

Brand-Rex Twin Sheath Steel Tape Armoured Multi-Loose Tube Cables are suitable for direct burial applications and other campus backbone environments where the cable may be subject to mechanical crush and impact.

FEATURES AND BENEFITS

- 4-24 Fibre Counts - 4 fibres per tube colour coded according to TIA-598-C
- Customisable Fibre Selection - single-mode, multi-mode and hybrid versions to suit a variety of applications
- Resin Bonded Glass Central Strength Member - for a flexible design with a high strength to weight ratio
- Stranded 2.1mm Gel Filled Loose Tubes - with red and green marker reference for simplified tube identification
- Corrugated Steel Tape Armour – for superior mechanical crush and impact resistance and optimum rodent protection
- Twin Sheath Design – offering additional mechanical protection and installation options
- Available in a range of sheath materials - to suit a variety of installation environments
- Included in the Leviton and Brand-Rex 25 Year System Warranties when used in conjunction with Leviton or Brand-Rex copper connectivity. System warranties available for qualified projects installed by certified contractors.

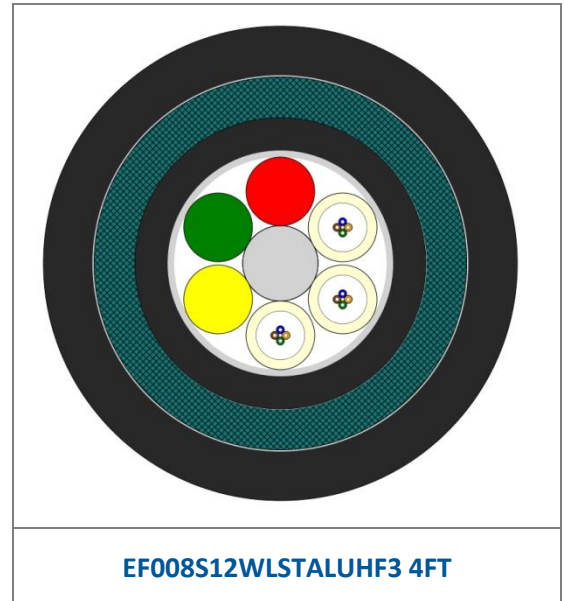

STANDARDS

Applicable Cable Standards: ISO/IEC 11801, IEC 60794 and BS EN 50173-1

Test Standards: IEC 60794-1-21 and IEC 60794-1-22

Water Penetration: IEC 60794 -1-22-F5C (*up to inner sheath only*)

FIBRE IDENTIFICATION

Fibre Identifier*	008	108	208	062	050	OM3	OM4
IEC 60793 Reference	2-50-B1.3	2-50-B6_a	2-50-B6_a	2-10-A1b	2-10-A1a.1	2-10-A1a.2	2-10-A1a.3
ITU-T Recommendation	G.652.D	G.657.A1	G.657.A2	n/a	G.651.1	G.651.1	G.651.1
ISO/IEC 11801 Category	OS1/OS2	OS1/OS2	OS1/OS2	OM1	OM2	OM3	OM4

Optical Twin Sheath Steel Tape Armoured Multi Loose Tube Cables

Datasheet: GD102837v2

MATERIAL IDENTIFICATION

Material Identifier**	LU	LUHF3	NM
Material Description	Standard HFFR-LS [†]	Enhanced HFFR-LS	PE - Polyethylene
Flammability Rating	IEC 60332-1-2	IEC 60332-3-24	n/a – External Only
Smoke Emission	IEC 61034-1 & 2	IEC 61034-1 & 2	n/a – External Only
Acid Gas Emission	IEC 60754-2	IEC 60754-2	n/a – External Only
Colour	Black	Black	Black

[†] Halogen Free Flame Retardant – Low Smoke

PHYSICAL CHARACTERISTICS

Fibre Count	No. Elements (Tubes/Fillers)	Nom. Tube Diameter (mm)	Nom. Cable Diameter (mm)	Nom. Cable Weight <i>M</i> (kg/km)		
				LU	LUHF3	NM
4-24	6	2.1	14.5	230	237	180

MECHANICAL PERFORMANCE

Fibre Count	Max. Long Term Load (N)	Max. Short Term Load (N)	Min. Static Bend (mm)	Min. Dynamic Bend (mm)	Max. Crush (N)	Max. Impact (Nm)	Max. Torsion (Turns ± 180°)
4-24	600	2000	10 x Cable Diameter	15 x Cable Diameter	5000	10	5

TEMPERATURE PERFORMANCE

Fibre Count	Operational Temperature Range	Storage Temperature Range	Installation Temperature Range
4-24	-40°C to + 70°C	-40°C to + 70°C	-10°C to + 70°C

Optical Twin Sheath Steel Tape Armoured Multi Loose Tube Cables

Datasheet: GD102837v2

Brand-Rex | a LEVITON[®]
company

PRINT LEGEND

Example print legend:

[Length Mark]M BRAND-REX OPTICAL FIBRE CABLE EF008S12WLSTALUHF3 4FT MADE IN UK [ID number] [Week/Year]

PACKAGING INFO

Fibre Count	Reel Size (flange x width mm)		Gross Weight [‡] (kg/reel)		Reels per Pallet	
	2km	4km	2km	4km	2km	4km
4-24	1400 x 800	1700 x 915	2M + 183	4M + 313	1	n/a

[‡] Refer to nominal cable weight for M.

PART NUMBER CONFIGURATOR

a - b - S - c - W - d₁ - STA - d₂ - 4FT

a = **HF** for standard design
EF for Enhanced LSHF

b = Fibre Identifier*
e.g. "**008**" for G.652.D fibre

c = 2 or 3 digit fibre count
e.g. "**02**" for 2 fibre cable

d = Material Identifier**
e.g. "**LU**" for standard HFFR-LS

Example part number: EF008S12WLSTALUHF3 4FT.

*"Brand-Rex is **dedicated to designing, developing and manufacturing**
sustainable **high performance** structured cabling and speciality **cabling solutions**"*

The information contained in this document is valid and correct at the time of issue. Brand-Rex reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.