

Category 6A S/FTP Euroclass B2_{ca} Cables

Datasheet: GD103120v1

Brand-Rex a LEVITON company

APPLICATION

The Brand-Rex AC6S/FTP B2_{ca} cables are compliant with the European Construction Products Regulation, achieving Euroclass level B2_{ca} according to EN 13501-6. These B2_{ca} Euroclass cables also have optimum levels of smoke emission, flaming droplets and acid gas production making them a versatile choice for any internal installation. The AC6S/FTP B2_{ca} Euroclass cables are suited to any high density backbone installation where people safety in the case of fire is a high priority.


Brand-Rex AC6S/FTP cables exceed the Category 6_A performance standards. They are rated to 500MHz and are suitable for use in all Class E_A structured wiring cable systems. The applications supported include 10 Gigabit Ethernet, Gigabit Ethernet, PoE and PoE+ and broadband video transmissions.

FEATURES AND BENEFITS

- 23 AWG Solid Annealed Copper Wire
- 4 Twisted Pairs Individually Screened and cabled together – providing EMI immunity
- Overall Braided Screen – for improved shielding efficiency, increased mechanical robustness and heat dissipation
- Designed to Support all Class E_A protocols including 10GBASE-T
- Supports Power Over Ethernet (PoE) and Power Over Ethernet Plus (PoE+) Applications
- Enhanced HFFR-LS* material meets the requirements of the Construction Products Regulation (CPR) Euroclass B2_{ca}
- Orange† Coloured Jacket to identify Euroclassification level B2_{ca}
- Included in the Leviton and Brand-Rex 25 Year System Warranties when used in conjunction with Leviton or Brand-Rex copper connectivity. System warranties available for qualified projects installed by certified contractors.

* Halogen Free Flame Retardant – Low Smoke

† Also available in a range of non-standard colours

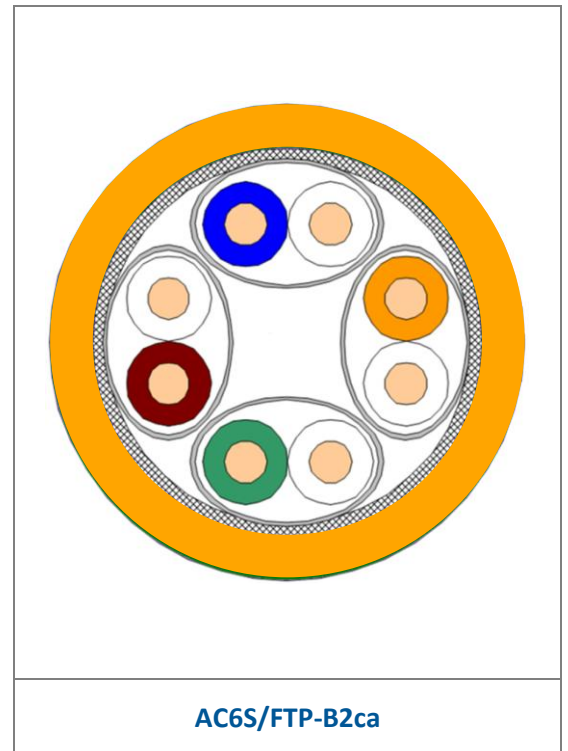

STANDARDS

Applicable Cable Standards: EN50288-10-1, IEC 61156-5 and ANSI/TIA-568-C.2 Cat 6A

REACTION TO FIRE

CHARACTERISTIC	STANDARD	RATING
Single Cable Flame Rating	IEC 60332-1-2	Pass
Bundled Cable Flame Rating	EN 50399 20.5kW source	B2 _{ca}
Smoke Production	EN 50399	s1a
Flaming Droplets / Particles	EN 50399	d0
Acid Gas Emission / Acidity	EN 50267-2-3	a1
Euroclassification	EN 13501-6	B2 _{ca} s1a d0 a1

Category 6A S/FTP Euroclass B2_{ca} Cables

Datasheet: GD103120v1



PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω / 100m	14Ω / 100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 25nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Coupling Attenuation	Type 1	90dB
Transfer Impedance	Grade 1	8mΩ/m @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	na	3.8	5.9	8.4	19.1	27.6	31.1	45.3	na
	<i>Typical</i>	1.9	3.5	5.5	7.8	18.0	26.1	29.4	43.0	45.4
NEXT (dB)	Standard	na	66.3	60.3	55.8	45.3	40.8	39.3	34.8	na
	<i>Typical</i>	100.0	100.0	100.0	100.0	94.3	88.9	87.1	81.7	81.0
PSNEXT (dB)	Standard	na	63.3	57.3	52.8	42.3	37.8	36.3	31.8	na
	<i>Typical</i>	97.0	97.0	97.0	97.0	91.3	85.9	84.1	78.7	78.0
ELFEXT (dB/100m)	Standard	na	56.0	48.0	42.0	28.0	22.0	20.0	14.0	na
	<i>Typical</i>	90.0	90.0	90.0	84.8	70.8	64.8	62.8	56.8	56.0
PSELFEXT (dB/100m)	Standard	na	53.0	45.0	39.0	25.0	19.0	17.0	11.0	na
	<i>Typical</i>	87.0	87.0	87.0	81.8	67.8	61.8	59.8	53.8	53.0
Return loss (dB)	Standard	20.0	23.0	25.0	25.0	20.1	18.0	17.3	17.3	na
	<i>Typical</i>	27.0	30.0	30.0	30.0	25.1	23.0	22.3	20.2	19.9
PSANEXT (dB)	Standard	67.0	67.0	67.0	67.0	62.5	58.0	56.5	52.0	na
	<i>Typical</i>	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
PSAACR-F (dB)	Standard	67.0	66.2	58.2	52.2	38.2	32.2	30.2	24.2	na
	<i>Typical</i>	98.1	96.5	94.5	92.2	82.0	73.9	70.6	57.0	54.6

Category 6A S/FTP Euroclass B2_{ca} Cables

Datasheet: GD103120v1

Brand-Rex | a **LEVITON**
company

INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg per simplex cable	Field Test NVP Value	0.80
Segregation Class	Class D		

PRINT LEGEND

Example print legend:

[Length Mark]m BRAND-REX a LEVITON company AC6S/FTP-B2ca Cat 6A S/FTP EN 50399 Euroclass B2ca s1a d0 a1 NVP 0.80
MADE IN UK [ID number] [Week/Year]

STANDARD PACKAGING SPECIFICATIONS

Brand-Rex Part Number	Packaging Length (m)	Colour	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange Diameter x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
AC6S/FTP-B2ca-500OR	500	Orange†	7.2	52.7	400 x 390	28.9	12
AC6S/FTP-B2ca-1000OR	1000	Orange†	7.2	52.7	600 x 405	59.2	4

†Also available in a range of non-standard colours

“Brand-Rex is dedicated to designing, developing and manufacturing sustainable high performance structured cabling and speciality cabling solutions”

The information contained in this document is valid and correct at the time of issue. Brand-Rex reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.