

Category 6 F/FTP EuroClass B2_{CA} Cables

Datasheet: GD103674v2

Brand-Rex | a **LEVITON** company

APPLICATION


Brand-Rex Cat6Plus cables exceed the Category 6 performance standards. They are rated to 500MHz and are suitable for use in all Class E structured wiring cable systems. The applications supported include Gigabit Ethernet, PoE, PoE+ and broadband video transmissions at frequencies up to 500MHz.

FEATURES AND BENEFITS

- 23 AWG solid annealed copper wire
- 4 twisted pairs individually screened and cabled together – providing EMI immunity
- Overall aluminium polyester screen – for improved shielding efficiency and increased heat dissipation
- Designed to support all Class E protocols including Gigabit Ethernet
- Supports Power Over Ethernet (PoE & PoE+) applications
- Enhanced HFFR-LS* jacket enables the cable to meet the requirements of the Construction Products Regulation (CPR) EuroClass B2_{CA}
- Orange† coloured jacket to identify EuroClass level B2_{CA}
- Included in the Leviton and Brand-Rex 25 Year System Warranties when used in conjunction with Leviton or Brand-Rex copper connectivity. System warranties available for qualified projects installed by certified contractors

* Halogen Free Flame Retardant – Low Smoke

† Also available in a range of non-standard colours

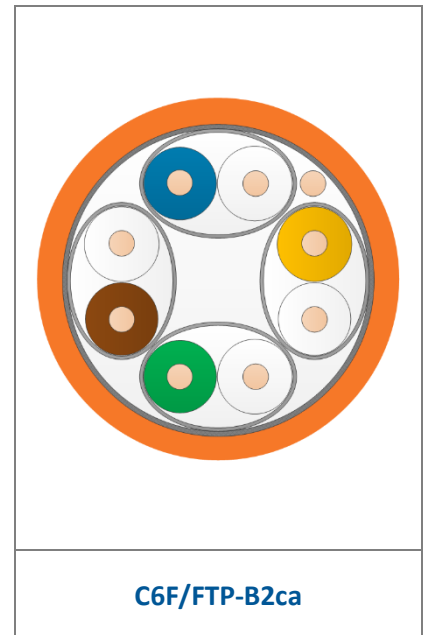

STANDARDS

Applicable Cable Standards: ISO/IEC 11801 Class E, IEC 61156-5 and EN50288-5-1

REACTION TO FIRE

CHARACTERISTIC	STANDARD	RATING
Single Cable Flame Rating	IEC/EN 60332-1-2	Pass
Smoke Production	EN 61034	Pass
Acid Gas Emission / Acidity	EN 50267-2-3	Pass
Classification	EN 13501-6	B2 _{CA} s1a d1 a1

PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω / 100m	14Ω / 100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

Category 6 F/FTP EuroClass B2_{CA} Cables

Datasheet: GD103674v2

Brand-Rex a LEVITON company

SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	413nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @ 100MHz	4nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Coupling Attenuation	Type 1b	84dB
Transfer Impedance	Grade 2	11mΩ/m @ 10MHz

ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250	500	550
Insertion Loss (dB/100m)	Standard	2.1	3.8	6.0	8.5	19.9	29.1	33.0	na	na
	<i>Typical</i>	1.9	3.5	5.5	7.8	18.0	26.1	29.4	43.0	45.4
NEXT (dB)	Standard	66.0	65.3	59.3	54.8	44.3	39.8	38.3	na	na
	<i>Typical</i>	100.0	100.0	100.0	100.0	94.3	88.9	87.1	81.7	81.0
PSNEXT (dB)	Standard	64.0	63.3	57.3	52.8	42.3	37.8	36.3	na	na
	<i>Typical</i>	97.0	97.0	97.0	97.0	91.3	85.9	84.1	78.7	78.0
ELFEXT (dB/100m)	Standard	66.0	58.0	50.0	44.0	30.0	24.0	22.0	na	na
	<i>Typical</i>	90.0	90.0	90.0	84.8	70.8	64.8	62.8	56.8	56.0
PSELFEXT (dB/100m)	Standard	64.0	55.0	47.0	41.0	27.0	21.0	19.0	na	na
	<i>Typical</i>	87.0	87.0	87.0	81.8	67.8	61.8	59.8	53.8	53.0
Return Loss (dB)	Standard	na	23.0	25.0	25.0	20.1	18.0	17.3	na	na
	<i>Typical</i>	27.0	30.0	30.0	30.0	25.1	23.0	22.3	20.2	19.9
ACR (dB/100m)	<i>Typical</i>	98.1	96.5	94.5	92.2	76.3	62.8	57.7	38.7	35.6
PSACR (dB/100m)	<i>Typical</i>	95.1	93.5	91.5	89.2	73.3	59.8	54.7	35.7	32.6

INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer Diameter
Temperature (Operation)	-20°C to +75°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg per simplex cable	Field Test NVP Value	0.80
Segregation Class	Class D		

PRINT LEGEND

Example print legend:

[Length Mark]m BRAND-REX a LEVITON company C6F/FTP-B2ca Cat 6 F/FTP EN 50399 EuroClass B2ca s1a d1 a1 NVP 0.80
MADE IN UK [ID number] [Week/Year]

Category 6 F/FTP EuroClass B2_{CA} Cables

Datasheet: GD103674v2

Brand-Rex | a **LEVITON**
company

STANDARD PACKAGING SPECIFICATIONS

Brand-Rex Part Number	Packaging Length (m)	Colour	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange x Width (mm)	Gross Weight (kg/Item)	Items Per Pallet
C6F/FTP-B2ca-500OR	500	Orange†	7.0	50.2	400 x 390	27.6	12
C6F/FTP-B2ca-1000OR	1000	Orange†	7.0	50.2	600 x 325	56.2	6

† Also available in a range of non-standard colours

*“Brand-Rex is **dedicated to designing, developing and manufacturing** sustainable **high performance** structured cabling and speciality **cabling solutions**”*

The information contained in this document is valid and correct at the time of issue. Brand-Rex reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.